



3.3.1 STEP 3 - VIEWING AND SHARING YOUR TRAINING ON WEB PAGES

UPDATE THE MULTILINGUAL NAVIGATION

The first set is to update the **mkdocs.yml** file.

1 - Create the new language for the navigation tab

Add the new language after the existing ones using the same script.

```
54     | generator: false
55     | alternate:
56     |   - name: English
57     |     link: ./
58     |     lang: en
59     |   - name: Français
60     |     link: ./fr/
61     |     lang: fr
62     |   - name: Italiano
63     |     link: ./it/
64     |     lang: it
65     |   - name: Deutsch
66     |     link: ./de/
67     |     lang: de
68     |   - name: Slovenščina
69     |     link: ./sl/
70     |     lang: sl
```

Script of languages setting in the .yml document.

- **name** : name of the language as it will appear in the navigation tab
- **link** : extension of all pages static web pages in the new language
- **lang** : ID used at the end of each markdown file for a single language

 For adding Spanish to the navigation tab

- **name** : Español
- **link** : ./es/
- **lang** : es

2 - Translate titles and contents



☰ Add new entries with the new language id: here **es** for **spanish**. **All existing navigation has to be provided in the new target language**


🗣️ Use **es** for **spanish**

```
425 "Mooc and on-line resources about AI and AI&Education": "Mooc in spletni viri o umetni inteligenci ter
426 "AI4T resources presentation": "Predstavitev virov AI4T"
427 "AI Tools for the LSEP": "Orodja UI za eksperimentiranje"
428 "Partners Resources": "Viri za partnerje"
429 es:
430 "Home": "Inicio"
431 "Explore and support the use of AI in education": "Explorar y apoyar el uso de la IA en la educación"
432 "OnLine Self Training": "Autoformación en línea"
433 "General Presentation": "Presentación general"
434 "0.1 What does this training offer us?": "0.1 ¿Qué nos ofrece esta formación?"
435 "0.2 Conditions of use": "0.2 Condiciones de uso"
```

Example of script adaptation to provide navigation in spanish.

HOW TO GENERATE THE STATIC WEB PAGES

Using GitHub pages, it is possible to generate static web pages and consult all the resources of the Mooc using a web browser. On your GitHub project page, you can display the predefined address of the static web pages as [YOURNAME[.GitHub.io/ai4t/]

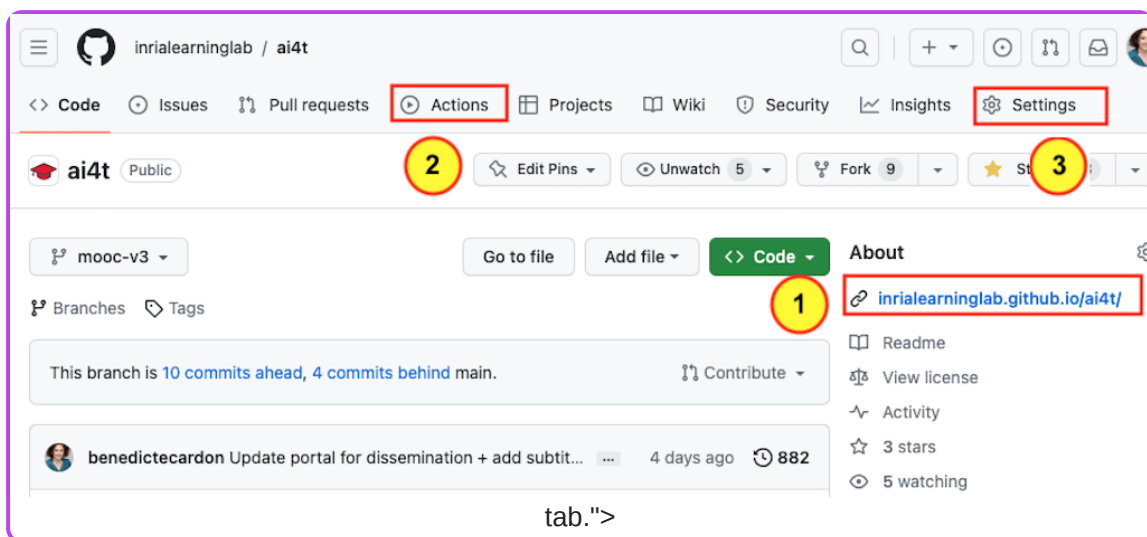


Access to the predefined address of the static webpages and localisation of action tab.

- 1 Access the visualisation of the GitHub pages.
- 2 Action tab : place to go to generate the static web pages.



Setting tab : update to make before going to **Action**- the action tab.

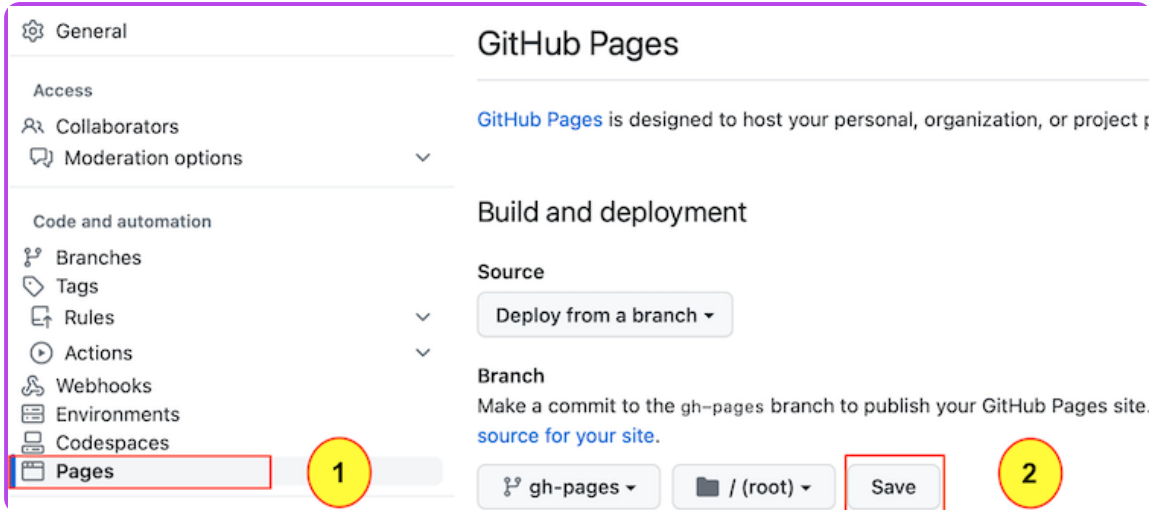


Access to the setting for the commit of github-pages.



Once in the setting, choose the Pages tab.



Click on the button to commit changes in the gh-pages.

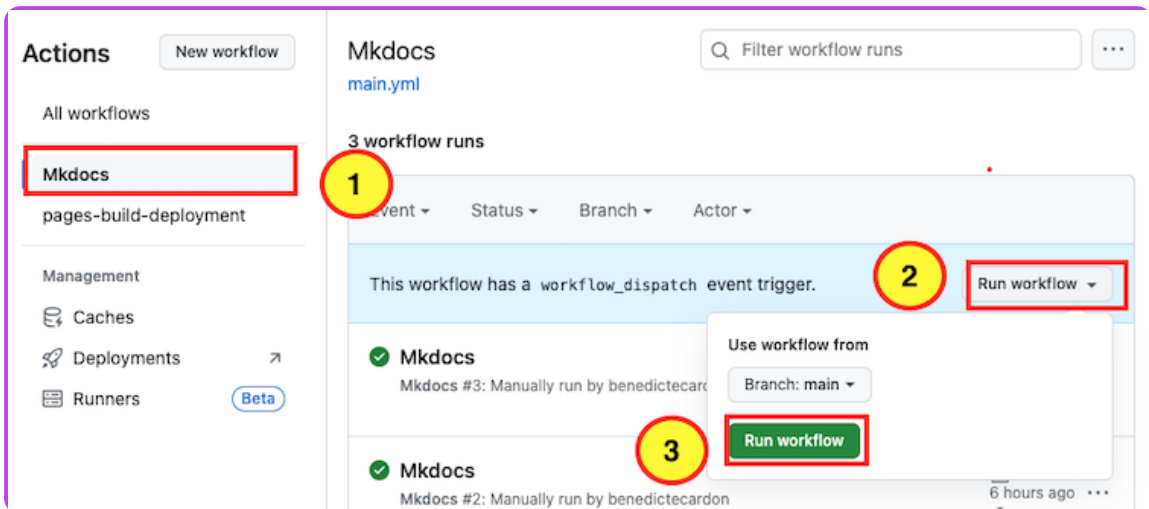

How to generate a new workflow in the action tab.

In order to generate the workflow, select the 3 elements in the order shown above.

It take time (several minutes) for the task to be completed. Then there is a time lag with the generation of static web pages, so you have to wait a little before you can view them on **YOURNAME.GitHub.io/ai4t/**.



These instructions are a very simplified presentation of how to view Github pages. For more details, consult the official git documentation: <https://pages.GitHub.com/>